



Caret

GLOBE 115

Our Caret range has expanded with a Globe version! The Caret Globe115 has the same benefits as the Caret Squirrel Cage and is of great added value to your luminaire.

The shape of the Globe and the filament are in perfect harmony and create a beautiful light source. In other words; a true asset to your interior!

Product data C0148.1



General Characteristics

Cap base	E27
Bulb	G115
Optimal performance	Base down
Rated lifetime (hours)	25000 hrs.
Lifetime $L_{80F_{05}}$	25000 hrs.
Switching cycle	> 50.000X



Product Dimensions

Overall length	177 mm
Diameter bulb	115 mm
Casing	41 mm



Light Technical Characteristics

Color designation (text)	Extra warm white
Color rendering index	> 80
Color temperature	2300 K
Rated luminous flux	400 lumen



Product Data

Order code	8718444430315
Order and product name	CARET Globe 115 230V / E27
Pieces per pack	1 pcs
Packs per outer box	6 pcs
Net weight per piece	150 gr.




Electrical Characteristics

Wattage	7,9 W
Voltage	230 V
Line frequency	50 ... 60 Hz
Power factor	>0.75
Current	44 mA
Dimmable	Yes*
Starting	Soft (0,8 sec.)



Environmental Characteristics

Energy efficient label	
Lamp mercury content	2,2 mg

*see recommended dimmer list www.caretlight.eu



Warning and Safety

- ⚠ Operating temperature range is between -10 °C and +50 °C ambient.
- ⚠ Only to apply in dry or damp locations and most open fixtures with lamp holders that offer sufficient space (10 mm free air space).
- ⚠ Not intended for use with emergency light fixtures or exit lights.



Remarks concerning Dimming

- ⚠ The Caret with dimming feature works with most conventional dimmers for incandescent lamps or halogens. Please refer to the recommended dimmer list on www.caretlight.eu for further information.
- ⚠ Certain dimmer switches may cause the Caret to flicker when it is illuminated below the "optimal minimum brightness level". The knob on the dimmer switch can be adjusted to prevent flickering.
(Note: Certain dimmer switches are equipped with a potentiometer. The potentiometer is a small device to fine-tune the setting for the desired minimum light output of the lamp without flickering.)



Clean up breakages and Disposal

- ⚠ Cleaning: follow the advice for proper clean up*
- ⚠ Disposal: follow the instructions for disposal as special waste**



Dimensional Drawing




Your sales contact

NDF Special Light Products B.V.
Leemstraat 40 - 44
4705 RH Roosendaal
The Netherlands

T. +31 165 538630
F. +31 165 539053
E. sales@ndf.eu
W. www.ndf.eu



www.caretlight.eu

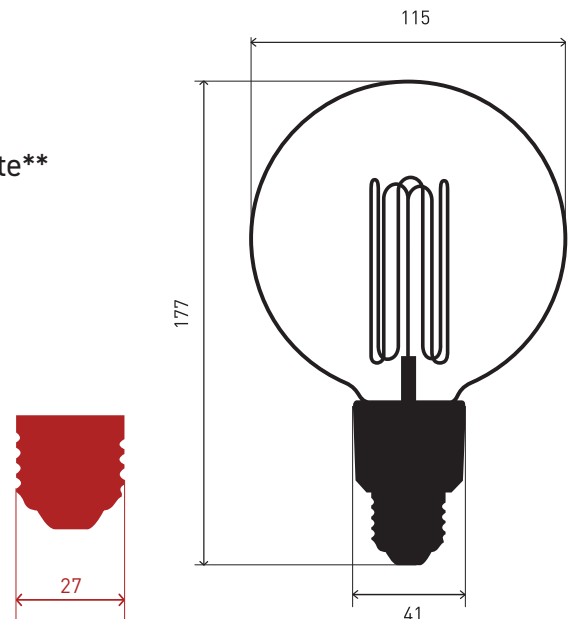

Specifications are subject to change without notice.

*Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove parts, preferably with gloves. Put them in a closed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

**Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.