

N D F

SPECIAL LIGHT PRODUCTS



LODRA TrafficLine

LODRA TrafficLine; Lightlines for safety, industry and decoration!

LODRA is a revolution in the field of lightline installing technique. It can be used for many applications, such as traffic, industry and safety, but also in the decorative market.

Lightline technology

LODRA is a lightline that gives a much clearer signal to traffic participants than current interrupted in-pavement LED markers. Its contrast and non-stop light technique generates a sharp and clear line, making it suitable for many safety situations, but also for decorative applications.

No glare

Its brightness is clearly visible in daylight situation. Built-in light sensors automatically dim the intensity of the light unit, to avoid disturbance in the evening and during the night. It is also possible to dim the light unit manually. Depending on the preference, this can be done in fixed steps or infinitely.


Multiple colors

LODRA is an RGB-lightline, so any color is possible. This will enable our customers to choose the color that best fits their application. Another option is to apply multiple colors in one line.

Running light

Although LODRA is considered to be 1 line, there are many options, for instance, as a 'running light' by lighting up 2 cm sequentially. Another option is to have a different light intensity every 2 cm or even generate a completely different color. This makes the lightline unique and appropriate for multiple situations.



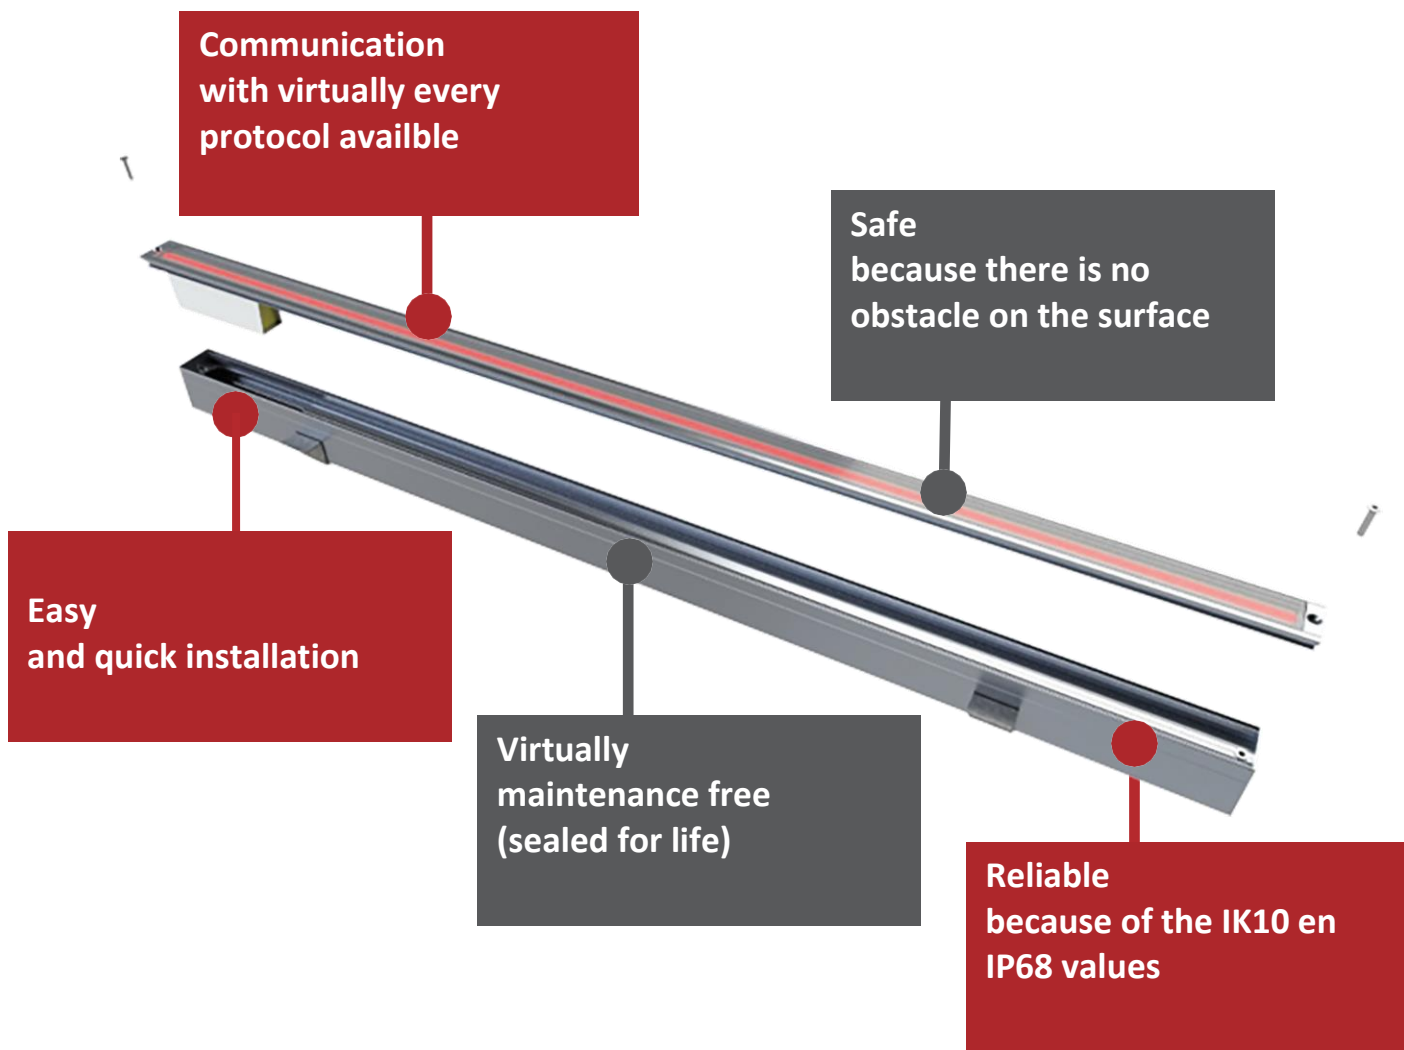

Communication

The software of LODRA is developed in such a way that it can communicate with virtually every protocol available. This ensures easy integration with these protocols.

Safe

The LODRA is a built-in fixture which will be mounted evenly with the surface where it is used (e.g. pavement, flooring, loading docks), so it is not an obstacle. The topside of the LODRA is made from frosted glass, making it non-skid.

Reliable

The unit is made from high-quality aluminium, which excludes corrosion. The combination with toughened safety glass, makes this unit compliant with IK-10, the highest value in hardness. All electronic components (including LEDs) are sealed and protected against moisture and dirt, making the unit compliant with IP68 (protection marking).

Easy

LODRA is designed for quick and easy installation. The system is installed during construction. LODRA is available in sizes from 60 cm to 150 cm (every next size is 30 cm larger) allowing for almost every desired size. As the units can be connected, they form an almost seamless lightline.

Maintenance

The unit is designed to withstand temperatures of -20°C to +60°C and optionally even to +70°C. The controller is situated in the unit, close to the LED-strip, making it impossible to disturb the communication between controller and LED. LODRA is a sealed-for-life application and no maintenance is needed during its technical lifetime. In the worst-case scenario, the LED unit and the control can be replaced easily from the upper side.

Lodra

Product information

Applications

Many applications are possible with the LODRA. Some examples:

LODRA SafetyLine	LODRA TrafficLine	LODRA DecoLine
As privacy and warning line at customs, banks and other environments with queues.	Lightline at crosswalks for pedestrians and cyclists where a traffic control system is already in place and can be connected to the LODRA.	To use as accent lighting on stairs, platforms, bridges etc.
As demarcation and warning light at platforms, loading docks and height differences, where there is danger of falling.	For escape routes, tunnel lighting etc. To guarantee a clear marking of the correct route that should be followed.	To indicate the walking direction in a store or a museum.
Signaling in the ground marks the safety areas in various industrial applications, such as heavy forklift traffic.	At guarded level crossings.	To enhance the value of attention in a retail environment.

Technical specifications

Specifications				
Voltage	Nominal	42VAC (36-50VAC)	Size (W x H x L)	60 x 80 x 600 or 900 or 1200 or 1500 mm (1500 is standard)
	Dim 1	31VAC (26-34VAC)	Materials:	
	Dim 2	20VAC (15-24VAC)	Housing: aluminum Brute Cover: layered and frosted glass	
Wattage	19 Watt @ 42VAC			
Fault response	Normal, regular: min. 80mA Failed: max. 33mA		Installation cable	7,5 meter / quad-core
Lightsource	LED		Connection	3 open strands
IP	68		Operational temperature	-20°C / +60° C
IK	10			

Connection/wiring

Cable	Use	
Black – core 1	N – neutral	neutral
Black – core 2	L – Line 1	Power red
Black – core 3	L – Line 2	Power green
Green / Yellow	Not used / not applicable	
Voltage maximum 50 volt AC		

Versie

Product number	Length	Color
E0886.1 LODRA TrafficLine Red / Green 1500mm	1500 mm	Red; 625 nm Green; 530 nm

LB01



NDF Special Light Products B.V.
Leemstraat 40 - 44
4705 RH Roosendaal
The Netherlands
T +31 (0)165 - 538 630
F +31 (0)165 - 539 053
www.ndf.eu
sales@ndf.eu